



Code: 910 080 03
9 PISTON PUMPS 80 LT.
TYP 910

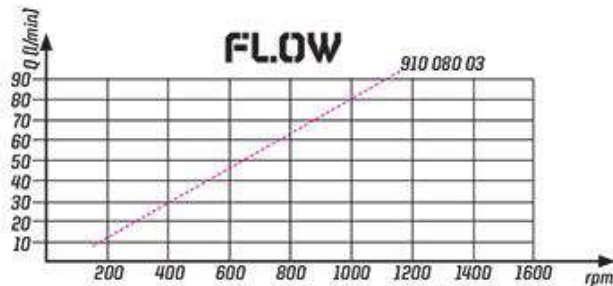

NOTE: THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50°


Fluid Temp. °C	Input Pres. Bar	Optimale K. Viscosity	Oil Filtering
0 / 90	0,3 / 2 bar	10 / 100 cST	> 200 bar : 25 um < 200 bar : 35 um

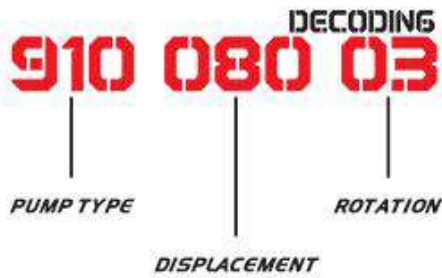

BIDIRECTIONAL PUMP

USED PLACED :
DUMPER TRUCKS
PRIVATE AIM WINCHES
TRACTOR LADLES

NOTE: TAKE A CONSIDERATION THAT OIL INLET TUBE CONNECTOR MUST BE VERTICAL POSSITION & THE PUMP MUST BE 100 mm DISTANCE TO THE OIL TANK DURING TO ASSEMBLY. BEFORE STARTING THE PUMP BLEED THE AIR.

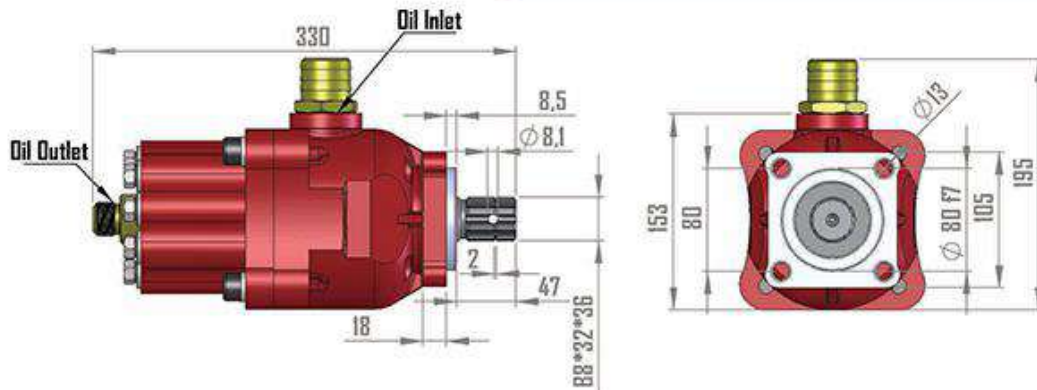

Code	Displacement cm³/1000	Rotation	Test Pressure 1	Test Pressure 2	Max. Test Pressure	Oil Inlet	Oil Outlet	Max. Con. Speed Rpm	Max. Inter. Speed Rpm	Weight
910 080 03	80,5	Double	280	300	320	6 1" 1/4"	6 1"	1800	2000	18

Test Pressure 1 : 60 sec. Test Pressure 2 : 15 sec. Max. Max Test Pressure : 5 sec. Max.