

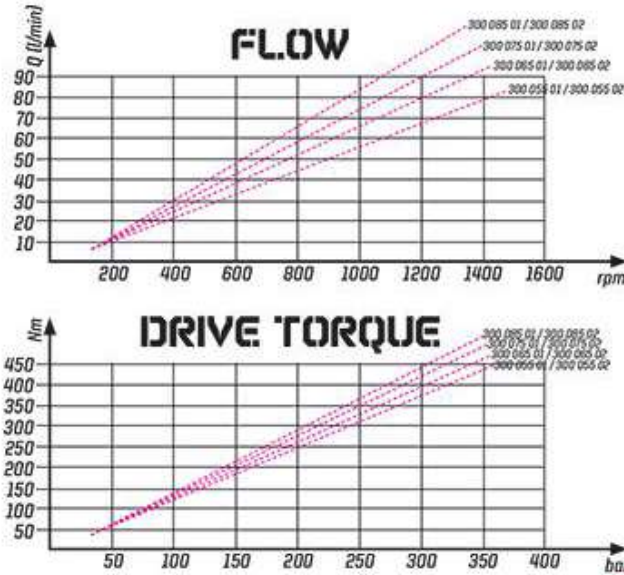


# 30 SERIAL GEAR PUMP

# UNI

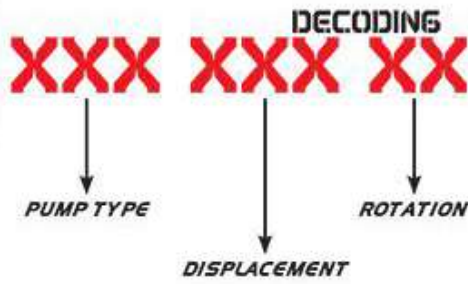


Fluid Temp. °C	Input Pres. Bar	Optimale K. Viscosity	Oil Filtering
0 / 100	0,3 / 1,7 bar	10 / 100 CST	> 200 bar : 25 um < 200 bar : 35 um

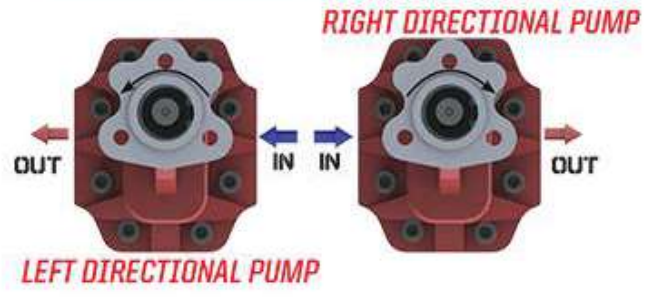

**NOTE :** THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50°

**NOTE :** SEE TECHNICAL PAGE TO CHANGE THE DIRECTION OF ROTATION

**USED PLACED :**  
DUMPER TRUCKS  
PRIVATE AIM WINCHES  
TRACTOR LADLES

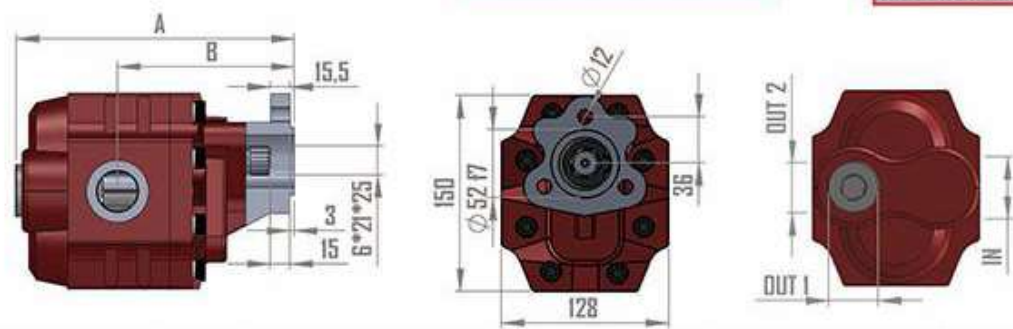

Code	Displacement cm <sup>3</sup> /1000	Rotation	Test Pressure 1	Max. Test Pressure	A	B	Oil Inlet	Oil Outlet	Max. Con. Speed Rpm	Max. Inter. Speed Rpm	Weight
300 055 01	55,8	Right	220	240	176	118	G 1 1/4"	G 1"	2500	3000	11,5
300 055 02	55,8	Left	220	240	176	118	G 1 1/4"	G 1"	2500	3000	11,5
300 065 01	65,4	Right	215	235	182	121	G 1 1/4"	G 1"	2450	2800	12
300 065 02	65,4	Left	215	235	182	121	G 1 1/4"	G 1"	2450	2800	12
300 075 01	75,2	Right	200	220	200	124	G 1 1/4"	G 1"	2150	2300	12,5
300 075 02	75,2	Left	200	220	200	124	G 1 1/4"	G 1"	2150	2300	12,5
300 085 01	85,1	Right	190	210	206	127	G 1 1/4"	G 1"	2000	2100	13
300 085 02	85,1	Left	190	210	206	127	G 1 1/4"	G 1"	2000	2100	13

Test Pressure : 60 sec                    Max Test Pressure : 5 sec. Max.